

# STATEMENT COLLECTION™ from JAMES HARDIE



ARCTIC WHITE




COBBLE STONE



NAVAJO BEIGE




KHAKI BROWN



MONTEREY TAUPE




TIMBER BARK




LIGHT MIST



PEARL GRAY




GRAY SLATE




BOOTHBAY BLUE



EVENING BLUE



AGED PEWTER



NIGHT GRAY



IRON GRAY




DEEP OCEAN

# ColorPlus® Technology


Why ColorPlus® Technology and not regular paint? Because our finish was developed especially for James Hardie fiber cement siding and we apply multiple coats, with each layer baked on in a closely controlled factory environment to ensure consistent coverage.

## 1 DURABLE FINISH

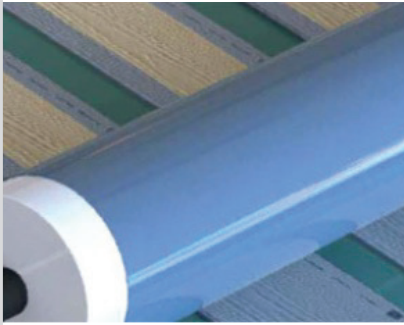


We apply multiple coats (50 percent more than your average house painter uses) of our proprietary finish to every surface and edge of our siding and trim, leaving no spot uncovered.

## 2 BAKED-ON BOND

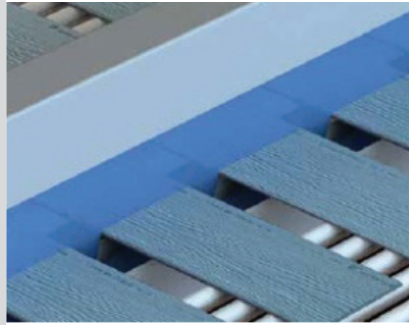

Between coats, we cure the finish in a controlled environment for an even stronger bond that resists chipping, peeling and cracking.

## 3 UV-RAY RESISTANCE

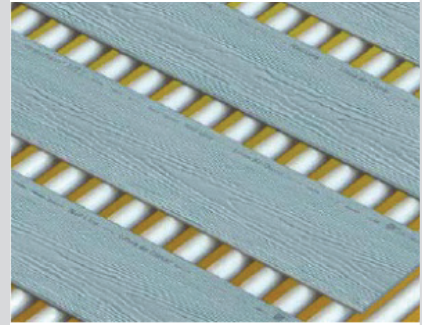

Vinyl siding and paint both fade in the sun. ColorPlus® Technology resists fading and looks good for longer.

## THE COLORPLUS® TECHNOLOGY WARRANTY

Our ColorPlus® Technology finish comes with a 15-year limited warranty that covers paint and labor, protecting against peeling, cracking, and chipping.

## COLORPLUS® TECHNOLOGY MAINTENANCE

Follow these recommendations to clean the exterior of your home and to help maintain the beauty and value of your James Hardie siding. Damage to siding and trim arising from improper maintenance may not be covered by the James Hardie warranty.

- Wash down the exterior every 6 to 12 months with a garden hose to remove dirt and debris. Gently clean the siding with a soft brush or wet cloth in a side to side motion in the direction of the plank.
- For stubborn dirt or stains, a mild detergent and soft to medium bristle (non-metal) brush may be used.



### PRESSURE WASHER WARNING:

Extra care should be taken when cleaning your siding and trim using a pressure washer. To minimize the chance of damaging your siding and trim, use a wide fan tip, keep a minimum of 6 feet from the wall and keep the pressure below 1500 psi.